



COMPACT EXCAVATORS

1.5 TO 10 TONS





What sets GRYB apart is not just the innovative products we manufacture, but the genuine care and support we have for our customers.



ÉRIC LOISELLE

Proud GRYB employee since 2010

COUPLERS

6	GTR Tiltrotator
7	AHS Wedge Attachment
8	Pin Grabber
9	Quick Hitch
9	AHJ Wedge Quick Coupler
24	Technical Specifications

BUCKETS

14	Digging Bucket
14	Ditching Bucket
14	Grading Bucket
15	Trench Bucket
15	Reversible Heavy Duty Digging Bucket John Deere Compatible
15	Reversible Ditching Bucket John Deere Compatible
26	Technical Specifications

THUMBS

17	Hydraulic Thumb on Stick Axle
32	Technical Specifications

SPECIALTY PRODUCTS

20	Root Rake
20	Ripper
20	Reversible Ripper John Deere Compatible
21	Asphalt Cutter
21	Pallet Fork
21	Grading Beam
33	Technical Specifications

GRYB wants to fundamentally transform the attachment and implements industry into a customer driven experience, fueled through the needs and challenges of the global market.

GRYB is at the core of a group of companies offering attachment solutions in the material handling, forestry & land clearing, steel production & distribution, construction, and ag & light industrial industries.



GRYB CONSTRUCTION

GRYB's compact excavator products are part of the GRYB Construction division. Our products represent quality and are meticulously crafted to surpass industry standards. Engineered with precision and durability in mind, they fortify infrastructure with unwavering reliability. Trust in our construction solutions for excellence that stands tall.



GTR 10

GRYB

GRYB

GRYB

COUPLERS

**GTR
TILTROTATOR**
6



**AHS WEDGE
ATTACHMENT**
7



**PIN
GRABBER**
8



**QUICK
HITCH**
9



**AHJ WEDGE
QUICK
COUPLER**
9





GTR TILTROTATOR

Carrier weight 2 to 9.9 tons	Rotation Infinite 360°	Tilting 40° on both sides
--	----------------------------------	-------------------------------------

Consider the GTR Tiltrotator as an extension to your machine's arm, providing the operator with the power to work with precision, agility, and efficiency. The GTR Tiltrotator excels on complicated jobs – it will transform your operations by delivering the highest productivity, accuracy, and versatility possible. Unlock endless possibilities with one of the most performant attachments on the market.

15% SAVINGS ON FUEL	30-40% INCREASE IN PRODUCTIVITY.	GREASE-FILLED GEAR HOUSING FOR IMPROVED PERFORMANCE AND LOW MAINTENANCE.
----------------------------	---	---

GTR TILTROTATOR MODELS FOR COMPACT EXCAVATORS



GTR04
For 2 to 4-ton excavators



GTR06
For 3 to 6-ton excavators



GTR10
For 6 to 10-ton excavators

GTR TILTROTATOR KEY FEATURES

3D GRADE CONTROL GATEWAY

Optional machine control integration systems can bring the Tiltrotator's tilt and rotation sensors into your machines 2D/3D technology.

CENTRALIZED LUBRICATION SYSTEM

Reduces number of lubrication points. Can be connected to the excavators lubrication system (if available).

WHEEL/TRACK STEERING

Wheel-Track steering systems are also available for momentary control of these functions from the joysticks.

ADVANCED CONTROL SYSTEM

Control your attachment with unparalleled precision with dual joystick controllers, a graphic touchscreen, optional track and wheel steering as well as multiple user profiles.

OPTIONAL GRIP MODULE

The GRYB grip module takes up very little space under the Tiltrotator and can be easily removed and reattached when needed without affecting the use or connection of the attachment.

MOUNT TYPES

The GTR Tiltrotators can be mounted differently according to your needs. Either fitted directly to your excavator or using the sandwich method, using the Hardlock® Quick Coupler or the Fast Change Coupler.

HARDLOCK® QUICK COUPLER

Switch attachments in a flash with the Hardlock® Quick Coupler which offers an added level of safety with double-locking devices, standard rear locking, and excentric locking system.



FAST CHANGE COUPLER*

With the Fast Change Coupler, stay in your cab at all times. It will bring maximum time savings to your business. The quick-release system can be combined with an FC Tiltrotator, making it easy to connect and disconnect without having to manually attach hoses.



* Compatible with GTR10 models and up



AHS WEDGE ATTACHMENT

Carrier weight 1.5 to 9.9 tons	Type Mechanical or hydraulic	Weight 285 to 1,135 lbs
--	--	-----------------------------------

The AHS coupling system combines innovation and simplicity. Designed and created by GRYB, this coupling system takes the excavation game to a whole-new level.

The compact design of the AHS includes a hydraulic dual-action, double cylinder and a lock valve, reducing the risk of getting stuck.

The angles of the locking blocks eliminate jamming and facilitate hydraulic unlocking. Available in mechanical or hydraulic configurations, which can be easily converted.

THE AHS IS DESIGNED TO INCREASE PRODUCTIVITY WITH A QUICK RETURN ON YOUR INVESTMENT.

- 1 The capacity of putting your attachments in reverse position optimizes your time on site. Work faster near foundations.
- 2 Efficient installation so that you can focus on getting the job done.
- 3 Reduced risk of breakage or leakage.

THE OTHER WAY AROUND

The AHS Coupling System can be used in reverse position, which increases efficiency when working near home foundations. Save time on job sites and maximize output.



COUPLERS

BUCKETS

THUMBS

PRODUCTS



PIN GRABBER

Carrier weight 1.5 to 9.9 tons	Locking Hydraulic sliding jaw	Weight 490 to 1,620 lbs
--	---	-----------------------------------

The GRYB hydraulic pin grabber coupling system allows you to work with a wide range of attachments. Made of heavy-duty steel, the sliding jaw design allows it to fit into multiple pin centers, permitting the handling of various OEM attachments with ease.

Use this equipment in reverse position with all its compatible attachments.

MAXIMIZE UPTIME WITH THE PIN GRABBER. BE UP AND RUNNING IN NO TIME!

- 1** Take advantage of the versatility this tool can bring to your machine. Perform different tasks without the need for specialized equipment.
- 2** The ability to switch attachments rapidly significantly increases cost savings. Make your business more profitable by using the pin grabber coupling system.

DOUBLE SAFETY FEATURE

The double safety feature offers two advantages. Firstly, it eliminates the likelihood of an attachment dropping on site. Secondly, it prevents incorrect grasping of the pin attached to the lugs. These benefits serve to safeguard the employees onsite in the event of any hydraulic malfunctions.





QUICK HITCH

Carrier weight 1.5 to 9.9 tons	Type Mechanical	Weight 425 lbs
--	---------------------------	--------------------------

The mechanical quick hitch coupling system optimizes the power of your excavator and simplifies your workflow so that you can save on time. Increase your machine's breakout force and switch attachments with ease.

The strong design of this attachment brings incredible value to your workforce. Transfer attachments between different machines of similar carrier weight. The design of the quick hitch allows you to use your attachment to its fullest, enabling you to save time and increase profitability!

INCREASED COMPATIBILITY

Having a quick hitch coupler provides the benefit of increased compatibility, allowing for seamless attachment transfer between same-category excavators. It provides a universal connection point.





AHJ WEDGE QUICK COUPLER

Carrier weight 1.5 to 9.9 tons	Compatibility John Deere 17 to 60	Type Mechanical or hydraulic
--	---	--

Boost your efficiency with the GRYB AHJ wedge coupler, designed specifically for John Deere compact excavators from 17 to 60. This coupler allows you to work in a reversible position, saving valuable time and reducing the need for constant machine repositioning. All GRYB attachments are fully AHJ-compatible, guaranteeing seamless integration with your John Deere machines. Plus, our patented lugs on buckets provide added durability and performance tailored for John Deere excavators.

COUPLERS

BUCKETS

THUMBS

SPECIALTY PRODUCTS

TECHNICAL SPECIFICATIONS







BUCKETS

**DITCHING
BUCKET**

14



**DIGGING
BUCKET**

14



**GRADING
BUCKET**

14



**TRENCH
BUCKET**

15



**REVERSIBLE
HEAVY DUTY
DIGGING
BUCKET
JOHN DEERE
COMPATIBLE**

15



**REVERSIBLE
DITCHING
BUCKET
JOHN DEERE
COMPATIBLE**

15





DIGGING BUCKET

Carrier weight

1.5 to 9.9 tons

Width

12 to 37 inches

Capacity0.04 to 0.54 yd³

Optimized angle filling and dumping.

Reversible attachments available.



Standard or wide tooth



Wear bars



Closed or Peugeot-type hook



Side cutters



DITCHING BUCKET

Carrier weight

1.5 to 9.9 tons

Width


24 to 60 inches

Capacity0.08 to 0.88 yd³

Reversible quick-couplers are available up to 15 tons.



Wear bars



Closed or Peugeot-type hook



Bolt-on blade



GRADING BUCKET

Carrier weight

2.3 to 9.9 tons

Width

36 to 54 inches

Capacity0.18 to 0.55 yd³**GTR Coupling System Compatible**

Minimized corners for a better clearance during the Tiltrotator's rotation.

Optimized material selection to lower weight without compromising durability.

Available with a bolt-on cutting edge.



TRENCH BUCKET

Carrier weight 2.3 to 9.9 tons	Width 12 to 16 inches	Capacity 0.1 to 0.22 yd ³
GTR Coupling System Compatible		

Dig deep trenches without the Tiltrotator having to go below the surface level.

Optimized material selection to lower weight without compromising durability.

Back wear plates made of abrasion-resistant AR500 steel.



REVERSIBLE HEAVY DUTY DIGGING BUCKET JOHN DEERE COMPATIBLE

Carrier weight 2.3 to 9.9 tons	Width 16 to 30 inches	Capacity 0.06 to 0.24 yd ³
---	------------------------------------	--

Made to handle various small materials in the construction industry.

Optimized angle for filling and dumping.

Side cutter available bolted or welded.



REVERSIBLE DITCHING BUCKET JOHN DEERE COMPATIBLE

Carrier weight 2.3 to 9.9 tons	Width 30 to 48 inches	Capacity 0.10 to 0.42 yd ³
---	------------------------------------	--

Filling and dumping at an optimized angle.



THUMBS

COUPLERS

BUCKETS

THUMBS

SPECIALTY PRODUCTS

TECHNICAL SPECIFICATIONS



HYDRAULIC THUMB ON STICK AXLE

Carrier weight 1.5 to 9.9 tons	Weight 80 to 320 lbs	Tines 2 or 4
--	--------------------------------	------------------------

Choice of two or four profiled tines.

135° rotation.



SPECIALTY PRODUCTS

ROOT RAKE

20



RIPPER

20



REVERSIBLE RIPPER

**JOHN DEERE
COMPATIBLE**

20



ASPHALT CUTTER

21



PALLET FORK

21



GRADING BEAM

21





COUPLERS

BUCKETS

THUMBS

SPECIALTY PRODUCTS

TECHNICAL SPECIFICATIONS



ROOT RAKE

Carrier weight 1.5 to 9.9 tons	Width 31 to 49 inches	Tines 6 or 7
---	------------------------------------	------------------------

Multiple configurations available for the spacing between tines.



RIPPER

Carrier weight 1.5 to 9.9 tons	Length 20 to 30 inches	Weight 40 to 160 lbs
---	-------------------------------------	-----------------------------------

Offers superior digging force.

Interchangeable bolt-on tooth.

Minimal maintenance is required.



REVERSIBLE RIPPER JOHN DEERE COMPATIBLE

Carrier weight 1.5 to 9.9 tons	Length 20 to 24 inches	Teeth J200, J225, J250
---	-------------------------------------	-------------------------------------

Offers superior digging force.

Interchangeable bolt-on tooth.



ASPHALT CUTTER

Carrier weight 2.3 to 9.9 tons	Weight 350 to 370 lbs	
GTR Coupling System Compatible		

COUPLERS



PALLET FORK

Carrier weight 2.3 to 9.9 tons	Width 50 inches	Capacity 5,500 lbs
GTR Coupling System Compatible		

BUCKETS

THUMBS

Multiple mechanical configurations available.



GRADING BEAM

Carrier weight 2.3 to 9.9 tons	Width 60 to 78 inches	Weight 660 to 895 lbs
GTR Coupling System Compatible		

SPECIALTY PRODUCTS

TECHNICAL SPECIFICATIONS

Powerful tool for grading smaller jobs such as driveways and trails.




COMPACT EXCAVATORS ATTACHMENTS

TECHNICAL SPECIFICATIONS



GTR TILTROTATOR

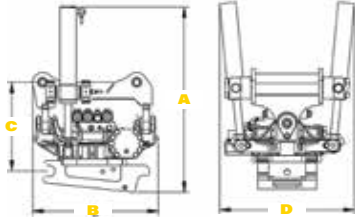

GTR04

For 2 to 4-tons excavators

GTR06

For 3 to 6-tons excavators

GTR10

For 6 to 10-tons excavators

		GTR04	GTR06	GTR10
Approx. Weight	LBS	216	331	518
Fit		Direct Fit/ S40 S Lock	Direct Fit/ S40 S Lock	Direct Fit/ S45 Hardlock or FC45 ¹
Dimensions* A / B / C / D	IN	28 / 18 / 13 / 17	28 / 19 / 14 / 16	34 / 23 / 17 / 24
Recommended Max. Oil Flow	GPM	16	21	26
Max. Working Pressure	PSI	3,046	3,046	3,046
Tilt Torque AT 3000 PSI, 21 MPA	LBS/FT	2,876	9,072	18,660
Rotation Speed	SEC/ROTATION	7	7	7
Turn Torque	LBS/FT	2,213	3,687	3,687
Max. breakout torque	LBS/FT	23,602	32,453	55,317
Max. breakout force	LBS	8,992	11,241	15,737
Recommended Max. Bucket Width	IN	42	52	56

GTR TILTROTATOR GRIP MODULE



MODEL	MAX OPENING IN	GRIPPING FORCE LBS	MAX LIFT. CAPACITY LBS	WEIGHT LBS	WIDTH FRONT IN	WIDTH REAR IN	MAX HYD. PRESSURE PSI
S40	18	1,326	880	88	17	19	3,046
S45 / S50	24	2,023	1,320	154	22	25	3,046

COUPLERS

BUCKETS

THUMBS

SPECIALTY PRODUCTS

TECHNICAL SPECIFICATIONS


AHS WEDGE ATTACHMENT



MODEL	CLASS	CARRIER WEIGHT TONS	TYPE	MACHINE WEIGHT LBS
AHS015	15	1.5 to 2.2	Mechanical or Hydraulic	40
AHS035	35	2.3 to 3.9	Mechanical or Hydraulic	80
AHS050	50	4 to 5.9	Mechanical or Hydraulic	120
AHS075	75	6 to 9.9	Mechanical or Hydraulic	165

PIN GRABBER



MODEL	CLASS	CARRIER WEIGHT TON	WEIGHT LBS	FRONT PIN DIAMETER IN	LOCKING SYSTEM	LOCKING TYPE
 PMB015	15	1.5 to 2.2	30	30	Mechanical	Pin
PGG035-035	35	2.3 to 3.9	85	35	Mec. or Hydr.	Sliding jaw
PGG040-035	35	2.3 to 3.9	100	40	Mec. or Hydr.	Sliding jaw
PGG045-050	50	4 to 5.9	160	45	Mec. or Hydr.	Sliding jaw
PGG050-050	50	4 to 5.9	165	50	Mec. or Hydr.	Sliding jaw
PGG045-075	75	6 to 9.9	225	45	Mec. or Hydr.	Sliding jaw
PGG050-075	75	6 to 9.9	225	50	Mec. or Hydr.	Sliding jaw
PGG055-075	75	6 to 9.9	230	55	Mec. or Hydr.	Sliding jaw
PGG060-075	75	6 to 9.9	250	60	Mec. or Hydr.	Sliding jaw

QUICK HITCH



MODEL	CLASS	CARRIER WEIGHT TONS	WEIGHT LBS	LOCKING SYSTEM
PWR125	35/50		70	Mechanical
PWR175	75		173	Mechanical



AHJ WEDGE QUICK COUPLER

Please contact our sales team for specifications.

COUPLERS

BUCKETS

THUMBS

SPECIALTY PRODUCTS

TECHNICAL SPECIFICATIONS

DIGGING BUCKET

GTR TILTROTATOR



MODEL	MACHINE WEIGHT TONS	TYPE OF RESISTANCE	WEIGHT LBS	WIDTH IN	CAPACITY YD ³	NUMBER OF TEETH	GTR COMPAT.
GED035-18C4-S40	2.3 to 3.9	HD or SHD	190	19	0.10	4	GTR04
GED035-20C4-S40	2.3 to 3.9	HD or SHD	195	21	0.12	4	GTR04
GED035-20C5-S40	2.3 to 3.9	HD or SHD	205	21	0.12	5	GTR04
GED035-24C5-S40	2.3 to 3.9	HD or SHD	220	25	0.14	5	GTR04
GED035-24C6-S40	2.3 to 3.9	HD or SHD	230	25	0.14	6	GTR04
GED050-18C4-S40	4 to 5.9	HD or SHD	230	19	0.14	4	GTR06
GED050-24C5-S40	4 to 5.9	HD or SHD	290	25	0.20	5	GTR06
GED050-24C6-S40	4 to 5.9	HD or SHD	300	25	0.20	6	GTR06
GED050-28C5-S40	4 to 5.9	HD or SHD	295	29	0.24	5	GTR06
GED050-28C6-S40	4 to 5.9	HD or SHD	300	29	0.24	6	GTR06
GED050-30C5-S40	4 to 5.9	HD or SHD	305	31	0.26	5	GTR06
GED050-30C6-S40	4 to 5.9	HD or SHD	315	31	0.26	6	GTR06
GED075-24D4-S45	4 to 5.9	HD or SHD	540	25	0.34	4	GTR06
GED075-24D5-S45	6 to 9.9	HD or SHD	555	25	0.34	5	GTR10
GED075-30D5-S45	6 to 9.9	HD or SHD	625	31	0.45	5	GTR10
GED075-30D6-S45	6 to 9.9	HD or SHD	635	31	0.45	6	GTR10
GED075-36D5-S45	6 to 9.9	HD or SHD	695	37	0.56	5	GTR10
GED075-36D6-S45	6 to 9.9	HD or SHD	705	37	0.56	6	GTR10

AHS



MODEL	CLASS	WEIGHT LBS	WIDTH IN	VOLUME YD ³	NUMBER OF TEETH
GAD015-12A3-SHR	15	100	12	0.04	3
GAD015-16A4-SHR	15	120	17	0.05	4
GAD015-18B4-SHR	15	125	19	0.06	4
GAD015-20B4-SHR	15	130	21	0.07	4
GAD015-20B5-SHR	15	140	21	0.07	5
GAD015-24B5-SHR	15	150	25	0.09	5
GAD015-24B6-SHR	15	155	25	0.09	6
GAD035-12B3-SHR	35	150	12	0.06	3
GAD035-16B4-SHR	35	175	17	0.09	4
GAD035-18B4-SHR	35	185	19	0.10	4
GAD035-20C4-SHR	35	195	21	0.11	4
GAD035-20C5-SHR	35	200	21	0.11	5
GAD035-24C5-SHR	35	220	25	0.14	5



GAD035-24C6-SHR	35	230	25	0.14	6
GAD035-30C5-SHR	35	245	31	0.18	5
GAD035-30C7-SHR	35	265	31	0.18	7
GAD035-36C6-SHR	35	280	37	0.22	6
GAD050-12B3-SHR	50	200	12	0.10	3
GAD050-16C4-SHR	50	230	17	0.12	4
GAD050-18C4-SHR	50	245	19	0.14	4
GAD050-24C5-SHR	50	285	25	0.20	5
GAD050-24C6-SHR	50	290	25	0.20	6
GAD050-30C5-SHR	50	315	31	0.24	5
GAD050-30C7-SHR	50	335	31	0.24	7
GAD050-36D6-SHR	50	360	37	0.32	6
GAD050-36D8-SHR	50	375	37	0.32	8
GAD075-15C3-SHR	75	420	15	0.18	3
GAD075-18C4-SHR	75	480	19	0.23	4
GAD075-24D4-SHR	75	540	25	0.33	4
GAD075-24D5-SHR	75	550	25	0.33	5
GAD075-30D5-SHR	75	610	31	0.45	5
GAD075-30D6-SHR	75	620	31	0.45	6
GAD075-36E6-SHR	75	680	37	0.54	6
GAD075-36E8-SHR	75	705	37	0.54	8

PIN GRABBER



MODEL	CLASS	WEIGHT LBS	WIDTH IN	CAPACITY YD ³	NUMBER OF TEETH
GAD015-12A3-P	15	95	12	0.04	3
GAD015-16A4-P	15	115	17	0.05	4
GAD015-18B4-P	15	120	19	0.06	4
GAD015-20B4-P	15	125	21	0.07	4
GAD015-20B5-P	15	135	21	0.07	5
GAD015-24B5-P	15	145	25	0.09	5
GAD015-24B6-P	15	155	25	0.09	6
GAD035-12B3-P	35	135	12	0.06	3
GAD035-16B4-P	35	165	17	0.09	4
GAD035-18B4-P	35	170	19	0.10	4
GAD035-20C4-P	35	180	21	0.11	4
GAD035-20C5-P	35	190	21	0.11	5
GAD035-24C5-P	35	205	25	0.14	5
GAD035-24C6-P	35	215	25	0.14	6

COUPLERS

BUCKETS

THUMBS

SPECIALTY PRODUCTS

TECHNICAL SPECIFICATIONS



GAD035-30C5-P	35	230	31	0.18	5
GAD035-30C7-P	35	250	31	0.18	7
GAD035-36C6-P	35	265	37	0.22	6
GAD050-12B3-P	50	190	12	0.10	3
GAD050-16C4-P	50	220	17	0.12	4
GAD050-18C4-P	50	235	19	0.14	4
GAD050-24C5-P	50	275	25	0.20	5
GAD050-24C6-P	50	280	25	0.20	6
GAD050-30C5-P	50	305	31	0.24	5
GAD050-30C7-P	50	325	31	0.24	7
GAD050-36D6-P	50	350	37	0.32	6
GAD050-36D8-P	50	365	37	0.32	8
GAD075-14C3-P	75	420	14	0.17	3
GAD075-16C3-P	75	438	17	0.20	3
GAD075-18C4-P	75	445	19	0.23	4
GAD075-24D4-P	75	505	25	0.33	4
GAD075-24D5-P	75	515	25	0.33	5
GAD075-30D5-P	75	575	31	0.45	5
GAD075-30D6-P	75	585	31	0.45	6
GAD075-36E6-P	75	643	37	0.54	6
GAD075-36E8-P	75	670	37	0.54	8

QUICK HITCH



MODEL	CLASS	WEIGHT LBS	WIDTH IN	CAPACITY YD ³	NUMBER OF TEETH
GWRD35-12B3-WR125	35	123	12	0.06	3
GWRD35-16B4-WR125	35	154	16	0.09	4
GWRD35-18B4-WR125	35	161	18	0.10	4
GWRD35-24C5-WR125	35	198	24	0.14	5
GWRD50-12B3-WR125	50	140	12	0.08	3
GWRD50-18C4-WR125	50	180	18	0.13	4
GWRD50-24C5-WR125	50	220	24	0.18	5
GWRD50-30C5-WR125	50	250	30	0.24	5
GWRD50-36D6-WR125	50	290	36	0.30	6
GWRD75-12C3-WR175	75	260	12	0.15	3
GWRD75-18C4-WR175	75	315	18	0.21	4
GWRD75-24D4-WR175	75	361	24	0.32	4
GWRD75-30D5-WR175	75	430	30	0.42	5
GWRD75-36E6-WR175	75	490	36	0.52	6

DITCHING BUCKET

AHS



MODEL	CLASS	WEIGHT LBS	WIDTH IN	VOLUME YD ³
GAF015-24B-SHR	15	105	24	0.08
GAF015-30B-SHR	15	125	30	0.10
GAF015-36C-SHR	15	140	36	0.12
GAF015-39C-SHR	15	150	39	0.13
GAF035-30C-SHR	35	200	30	0.18
GAF035-36C-SHR	35	230	36	0.23
GAF035-42D-SHR	35	255	42	0.26
GAF035-48D-SHR	35	280	48	0.31
GAF050-42D-SHR	50	330	42	0.36
GAF050-48D-SHR	50	365	48	0.42
GAF050-54D-SHR	50	395	54	0.47
GAF050-60E-SHR	50	430	60	0.53
GAF075-36D-SHR	75	475	36	0.50
GAF075-42E-SHR	75	515	42	0.59
GAF075-48E-SHR	75	550	48	0.70
GAF075-54E-SHR	75	600	54	0.78
GAF075-60F-SHR	75	640	60	0.88

PIN GRABBER



MODEL	CLASS	WEIGHT LBS	WIDTH IN	CAPACITY YD ³
GAF015-24B-P	15	101	24	0.08
GAF015-30B-P	15	120	30	0.10
GAF015-36C-P	15	140	36	0.12
GAF015-39C-P	15	145	39	0.13
GAF035-30C-P	35	190	30	0.18
GAF035-36C-P	35	215	36	0.23
GAF035-42D-P	35	245	42	0.26
GAF035-48D-P	35	270	48	0.31
GAF050-36D-P	50	TBD	TBD	TBD
GAF050-42D-P	50	330	42	0.36
GAF050-48D-P	50	365	48	0.42
GAF050-54D-P	50	395	54	0.47

COUPLERS

BUCKETS

THUMBS

SPECIALTY PRODUCTS

TECHNICAL SPECIFICATIONS



COUPLERS



GAF050-60E-P	50	430	60	0.53
GAF075-36D-P	75	430	36	0.50
GAF075-42E-P	75	470	42	0.59
GAF075-48E-P	75	515	48	0.70
GAF075-54E-P	75	555	54	0.78
GAF075-60F-P	75	595	60	0.88

QUICK HITCH

BUCKETS



MODEL	CLASS	WEIGHT LBS	WIDTH IN	CAPACITY YD ³
GWRF35-30C-WR125	35	214	30	0.18
GWRF35-36C-WR125	35	208	36	0.22
GWRF35-42D-WR125	35	287	42	0.26
GWRF50-36D-WR125	50	290	36	0.29
GWRF50-42D-WR125	50	325	42	0.35
GWRF50-48D-WR125	50	365	48	0.4
GWRF75-42E-WR175	75	520	42	0.53
GWRF75-48E-WR175	75	578	48	0.62
GWRF75-54E-WR175	75	636	54	0.7
GWRF75-60F-WR175	75	694	60	0.8

THUMBS

GRADING BUCKET WITH BEVELED CORNERS

GTR TILTROTATOR

SPECIALTY PRODUCTS



MODEL	MACHINE WEIGHT TONS	WEIGHT LBS	WIDTH IN	CAPACITY YD ³	GTR COMPAT.
GEF035-36C-S40	2.3 to 3.9	260	36	0.18	GTR04
GEF035-42C-S40	2.3 to 3.9	290	42	0.20	GTR04
GEF035-48C-S40	2.3 to 3.9	330	48	0.25	GTR04
GEF050-42D-S40	4 to 5.9	360	42	0.30	GTR06
GEF050-48D-S40	4 to 5.9	400	48	0.35	GTR06
GEF075-48D-S45	6 to 9.9	600	48	0.48	GTR10
GEF075-54E-S45	6 to 9.9	665	54	0.55	GTR10

TECHNICAL SPECIFICATIONS

TRENCH BUCKET

GTR TILTROTATOR



MODEL	MACHINE WEIGHT TONS	WEIGHT LBS	WIDTH IN	CAPACITY YD ³	NUMBER OF TEETH	GTR COMPAT.
GET035-12C0-S40	2.3 to 3.9	165	12	0.10	0	GTR04
GET035-12C3-S40	2.3 to 3.9	195	12	0.10	3	GTR04
GET050-14C0-S40	4 to 5.9	220	14	0.16	0	GTR06
GET050-14C3-S40	4 to 5.9	250	14	0.16	3	GTR06
GET075-14C0-S45	6 to 9.9	390	14	0.21	0	GTR10
GET075-14C3-S45	6 to 9.9	425	14	0.21	3	GTR10
GET075-16C0-S45	6 to 9.9	410	16	0.22	0	GTR10
GET075-16C3-S45	6 to 9.9	445	16	0.22	3	GTR10



REVERSIBLE HEAVY DUTY DIGGING BUCKET JOHN DEERE COMPATIBLE

AHJ WEDGE QUICK COUPLER

Please contact our sales team for specifications.



REVERSIBLE DITCHING BUCKET JOHN DEERE COMPATIBLE

AHJ WEDGE QUICK COUPLER

Please contact our sales team for specifications.

COUPLERS

BUCKETS

THUMBS

SPECIALTY PRODUCTS

TECHNICAL SPECIFICATIONS

HYDRAULIC THUMB ON STICK AXLE

AHS & QUICK HITCH



MODEL	CLASS	WEIGHT LBS	TINE WIDTH IN	NUMBER OF TINES
POB015-21L	15	70	11	2 straight
POB035-28A	35	100	7	2 profiled
POB035-28B	35	105	10-1/2	2 straight
POB035-28C	35	120	15-1/2	4
POB050-31A	50	145	7-1/2	2 profiled
POB050-31B	50	155	12-1/2	2 straight
POB050-31C	50	180	19	4
POB075-39A	75	235	8	2 profiled
POB075-39B	75	255	14-1/2	2 straight
POB075-39C	75	295	21-1/2	4

PIN GRABBER

MODEL	CATEGORY	WEIGHT LBS	TINES WIDTH IN	NUMBER OF TINES
POB015-2L	15	80	11-1/8	2 straight
POB035-2P	35	105	7	2 profiled
POB035-2L	35	110	10-1/2	2 straight
POB035-4L	35	125	15-9/16	4
POB050-2P	50	165	7-1/4	2 profiled
POB050-2L	50	170	12-1/4	2 straight
POB050-4L	50	195	19	4
POB075-2P	75	265	8	2 profiled
POB075-2L	75	285	14-1/2	2 straight
POB075-4P	75	320	21-1/2	4

COUPLERS

BUCKETS

THUMBS

SPECIALTY PRODUCTS

TECHNICAL SPECIFICATIONS

ROOT RAKE

AHS



MODEL	CLASS	WEIGHT LBS	WIDTH IN	DISTANCE BE- TWEEN TINES IN	NUMBER OF TINES
PED015-30L6-SHR	15	135	31	5-1/2	6
PED015-36L6-SHR	15	145	37	6-3/4	6
PED015-36L7-SHR	15	155	37	5-9/16	7
PED035-36L6-SHR	35	265	37	6-3/4	6
PED035-36L7-SHR	35	285	37	5-9/16	7
PED050-42L6-SHR	50	435	43	7-7/8	6
PED050-42L7-SHR	50	470	43	6-1/2	7
PED050-48L6-SHR	50	460	49	9	6
PED050-48L7-SHR	50	490	49	7-1/2	7
PED075-48L6-SHR	75	815	49	9-1/2	6
PED075-48L7-SHR	75	890	49	7-1/8	7

PIN GRABBER



MODEL	CLASS	WEIGHT LBS	WIDTH IN	DISTANCE BETWEEN TINES IN	NUMBER OF TINES
PED015-30L6-P	15	120	31	5-1/2	6
PED015-36L6-P	15	140	37	6-3/4	6
PED015-36L7-P	15	150	37	5-1/2	7
PED035-36L6-P	35	260	37	6-3/4	6
PED035-36L7-P	35	280	37	5-1/2	7
PED050-42L6-P	50	415	43	7-7/8	6
PED050-42L7-P	50	445	43	6-1/2	7
PED050-48L6-P	50	440	49	9	6
PED050-48L7-P	50	475	49	7-1/2	7
PED075-48L6-P	75	765	49	9-1/2	6
PED075-48L7-P	75	845	49	7-1/8	7

COUPLERS

BUCKETS

THUMBS

SPECIALTY PRODUCTS

TECHNICAL SPECIFICATIONS

RIPPER

GTR TILTROTATOR



MODEL	MACHINE WEIGHT TONS	WEIGHT LBS	HEIGHT IN	GTR COMPAT.
RIP3550-24L-S40	2.3 to 5.9	120	24	GTR04 - GTR06
RIP075-30L-S45	6 to 9.9	210	30	GTR10

AHS



MODEL	CLASS	HEIGHT IN	WEIGHT LBS
RIP015-20L-SH_	15	20	55
RIP035-24L-SH_	35	24	125
RIP050-24L-SH_	50	24	145
RIP075-30L-SH_	75	30	240

PIN GRABBER



MODEL	CLASS	WEIGHT LBS	HEIGHT IN
RIP015-20L-P	15	55	20
RIP035-24L-P	35	120	24
RIP050-24L-P	50	135	24
RIP075-30L-P	75	215	30

AHJ WEDGE QUICK COUPLER

Please contact our sales team for specifications.



PALLET FORK

GTR TILTROTATOR



MODEL	MACHINE WEIGHT TONS	WEIGHT LBS	WIDTH IN	VOL. YD ³	FORK SIZE IN - WxHxL	LIFTING CAPACITY LBS	GTR COMPAT.
FLI02-50LBD48-S40	2.3 to 5.9	650	50	5,500	5X1.5X48	5,500	GTR04 - GTR06
FLI02-50LBD48-S45	6 to 9.9	690	50	5,500	5X1.5X48	5,500	GTR10

GRADING BEAM

GTR TILTROTATOR



MODEL	MACHINE WEIGHT TONS	WEIGHT LBS	WIDTH IN	ROLLER DIA. IN	GTR COMPAT.
GBP060-S40	2.3 to 5.9	660	60	10.75	GTR04 - GTR06
GBP078-S40	2.3 to 5.9	850	78	10.75	GTR04 - GTR06
GBP078-S45	6 to 9.9	895	78	10.75	GTR10

ASPHALT CUTTER

GTR TILTROTATOR



MODEL	MACHINE WEIGHT TONS	WEIGHT LBS	WIDTH IN	CAPACITY YD ³	GTR COMPAT.
COA075-19D-S40	2.3 to 5.9	60	19	350	GTR04 - GTR06
COA075-19D-S45	6 to 9.9	60	19	370	GTR10

COUPLERS

BUCKETS

THUMBS

SPECIALTY PRODUCTS

TECHNICAL SPECIFICATIONS



1-844-604-1396 - INFO@GRYB.COM

FOLLOW US     



GRYB.COM